

PF66 ACOUSTIC SHIELD *studio*





GENERAL INTRODUCTION


The PF66 is a portable studio screen made by an outer composite panel, a wool fabric layer and an inner acoustic-foam a unique, 3-layer design that imparts near-zero sonic coloration to your tracks. Through adjust horizontal and vertical link you can place the microphone in the proper site. Get great-sounding recordings without breaking the bank, PF66 is you better choice.

FEATURES


- * Lightweight and rugged materials;
- * Telescopic link;
- * Easily installed.

INSTALLATION INSTRUCTIONS
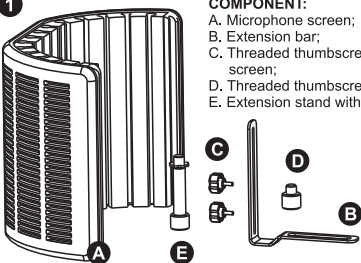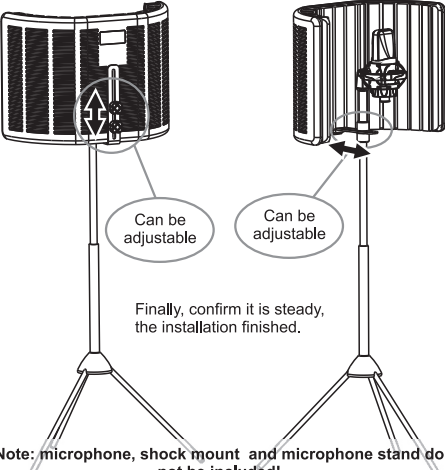
<p>1</p>  <p>COMPONENT: A. Microphone screen; B. Extension bar; C. Threaded thumbscrew for screen; D. Threaded thumbscrew for mic; E. Extension stand with thread.</p>	<p>2</p> <p>First, fix two threaded thumbscrews(C) in the microphone screen (A);</p> 
<p>3</p>  <p>Second, through extension bar (B) to connect threaded thumbscrew for microphone (D) and then fix extension stand with thread (E);</p>	<p>4</p>  <p>Can be adjustable</p> <p>Can be adjustable</p> <p>Finally, confirm it is steady, the installation finished.</p> <p>Note: microphone, shock mount and microphone stand do not be included!</p>

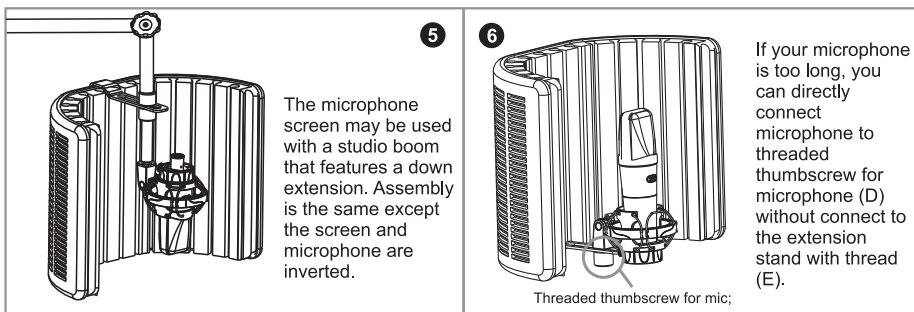

PRODUCT APPLICATION

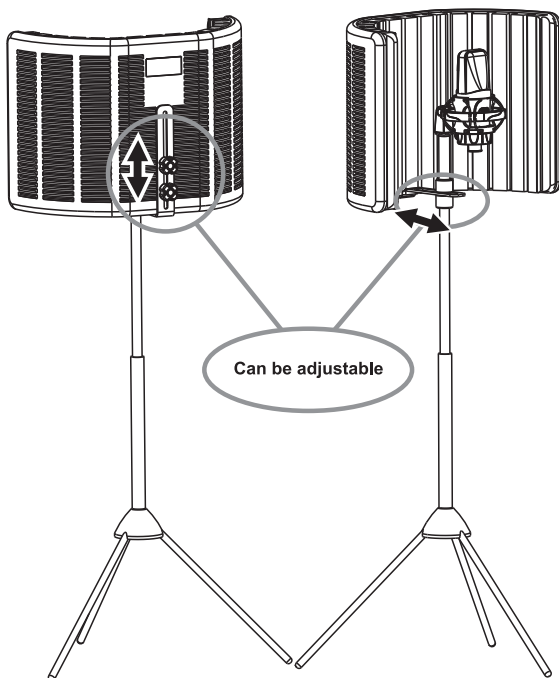

1. Loosen two threaded thumbscrews for screw (C) which fixed on the back of microphone screen (A), you can vertical adjust the position of microphone screen (A) by your own willing. Until microphone in the proper position, then you can fix two threaded thumbscrew for screen(C);

2. Loosen threaded thumbscrew for microphone (D), you can horizontal adjust the position of microphone through extension bar (B). Until microphone in the proper position, then you can fix threaded thumbscrew for microphone(D);

3. After finish above steps, you can begin to recording. If you still unsatisfied with the position, you can according to the above steps readjust the position, until you get your satisfied position.

Note: The other two applications are the same as this one.

SPECIFICATION

- * Net weight: 1576g
- * Diameter: 420mm
- * Radius: 185mm
- * Height: 300mm
- * Shell: ABS

ALCTRON is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

PF66便携式录音防风屏


产品介绍


PF66 是一款便携式录音防风屏，由塑料反射板、过滤羊毛尼布和吸音海绵组成。这种独特的三层材料设计让PF66提供了一种几乎无音染的环境。通过调节防风屏水平和垂直连接杆，可以将话筒置于防风屏内最佳的录音位置。想要录制高品质的声音，有时候其实不需要花费大价钱，PF66是您不错的选择。

特征


- * 材料轻便而坚固；
- * 可伸缩杆设计；
- * 安装简便。

安装说明

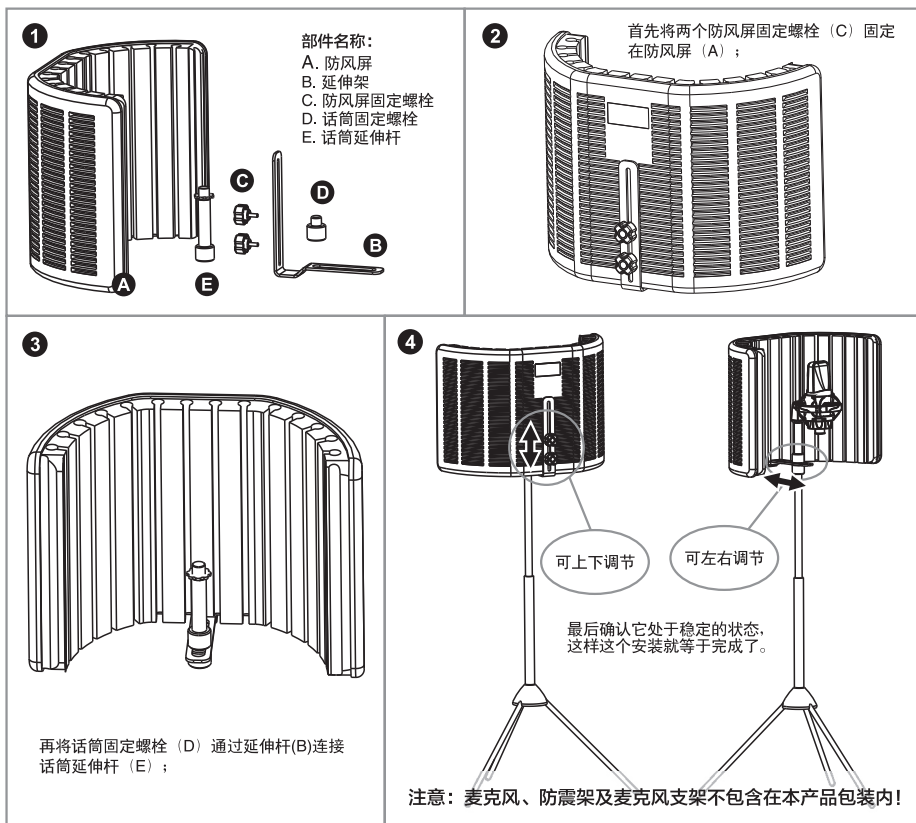

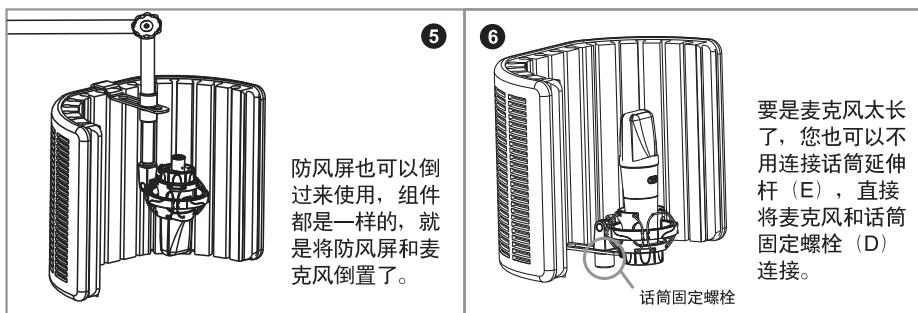

产品应用

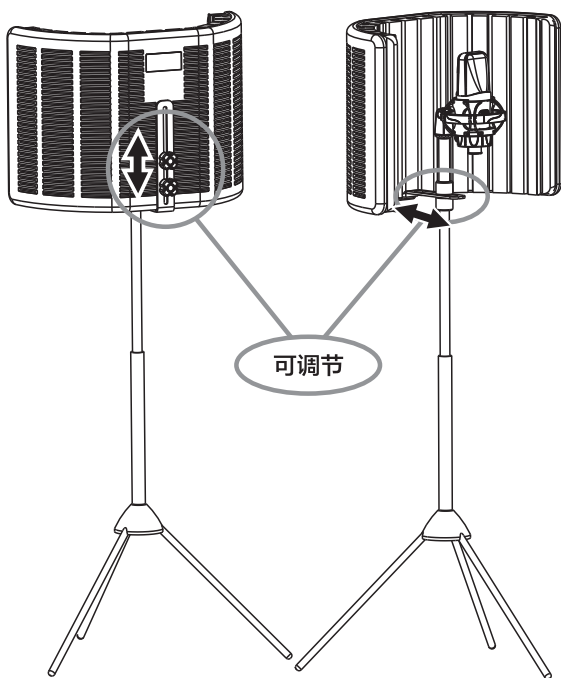

1. 松开防风屏(A)后面的两个防风屏固定螺栓(C)后，您可以在垂直位置自由调整防风屏(A)，以便麦克风位于合适的位置，然后固定两个防风屏固定螺栓(C)；

2. 松开话筒固定螺栓(D)，在水平方向沿着纹道转动延伸杆(B)，只要将麦克风放在正确的位置后，就可以固定话筒固定螺栓了(D)；

3. 完成上述步骤后，您就可以开始录音了，如果您对这个位置不满意，您可以按照上述步骤再调整一下，直达调整到您想要的效果为止。

注意：另外两种的使用方式跟第一种是一样的。

产品参数

- * 净重: 1576克
- * 直径: 420mm
- * 半径: 185mm
- * 高度: 300mm
- * 外壳: ABS

奥创电子有限公司始终尽力确保和提高产品的质量水平。必要的修改将不预先通知予以实行。因此产品的技术数据和外观可能与所述说明或插图有不同之处，敬请谅解。

宁波市鄞州奥创电子有限公司 地址: 浙江省宁波市鄞州区秀丰工业区三成路76号 电话: ++86 574 88009874
 传真: 0574-87157176 邮箱: sales@alctron-audio.com 网址: http://www.alctron-audio.com
 全国统一服务热线: 4000-160-112